

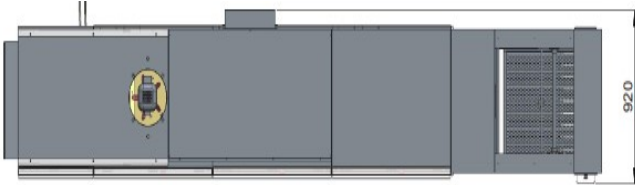
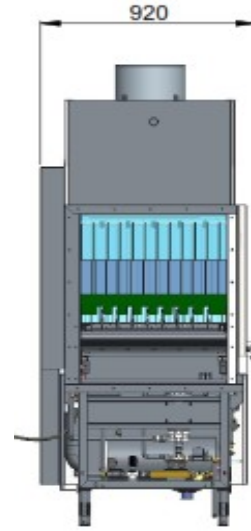


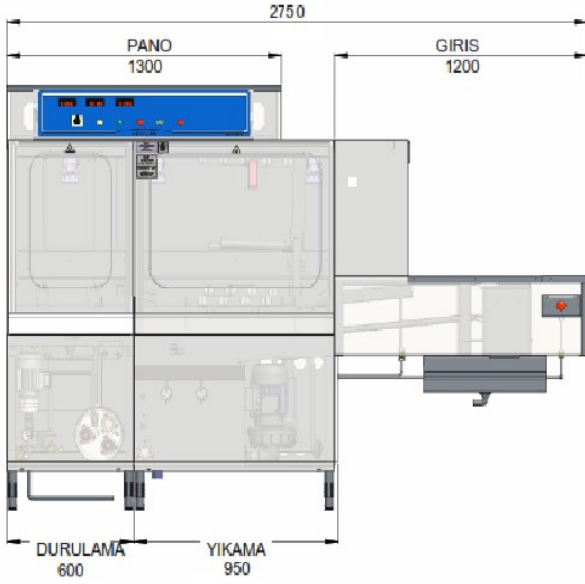

BYF 300 LR FLIGHT TYPE DISHWASHER

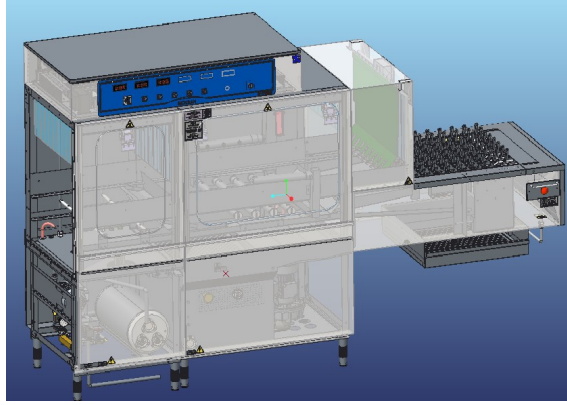

BYF 300 LR
FLIGHT TYPE
DISHWASHER

ÜR- BYF300 LR

İNOKSAN A.Ş.

Revision No : 0

Revision Date : 26.03.2019

GENERAL FEATURES

- * Electromechanically controlled,
- * Washing module with 11 washing arms ,
- * Duo rinsing system and internal rinsing pump,
- * Easy to dismount/mount washing/ rinsing arms and filters for cleaning purposes ,
- * Possibility of washing kitchen utensils with a height of max. 400 mms ,
- * Safety system to stop the operation of the dishwasher when the door is opened,
- * Rack dimensions 500x500 mms ,
- * Temperature safety thermostats of boiler,
- * Temperature safety thermostats of well,
- * Parts in contact with water manufactured of AISI 304 Cr-Ni s/s sheet,
- * 2 pcs cutlery rack ,
- * Optionals: Detergent pump, rinse aid pump and heat recovery system ,
- * Water level in the tank controlled automatically by presostat ,
- * Pallet type belt system for the transportation of the soiled utensils with a reducer of speed increase ,
- * Digital thermometers displaying the water temperature ,
- * Modular system (Entry, washing, duo rinsing, drying, exit)

TECHNICAL SPECIFICATIONS

Water inlet	3/4	inches
Water pressure	2-4	Bar
Electric inlet	380-50	V-Hz.
Washing Motor Power	3	kW
Durulama pompası gücü	0.19	kW
Max. Electric Power	47,5	kW
Frequency	50-60	Hz
Water consumption	480	Lts/hour
Tank Power	12	kW
Boiler Power	32	kW
Reducer motor power	0,37	kW
Washing Temperature	55	°C
Rinsing Temperature	85	°C
Water inlet temperature	45-50	°C
Boiler volume	35	lts
Main washing tank Water volume	125	lts
Plate capacity	3000	pcs/h
Tray capacity	1500	pcs/h
Plate Diameter Max.	360	mms
Max . utensil height	400	mms
Cable section	4x16	mm2