
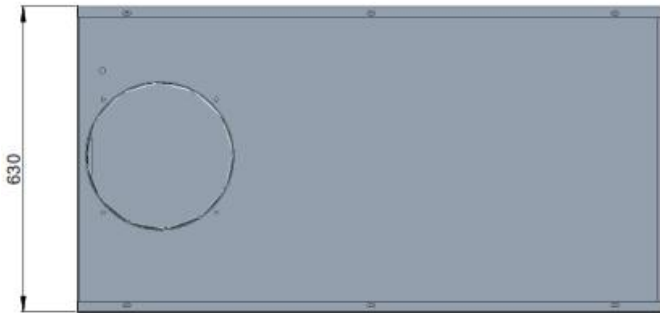
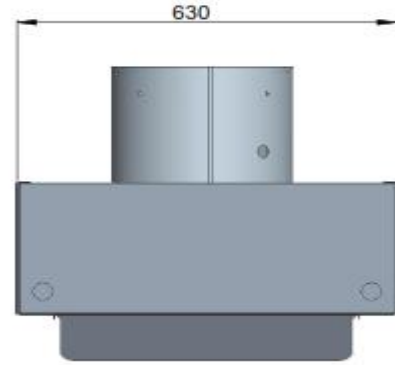
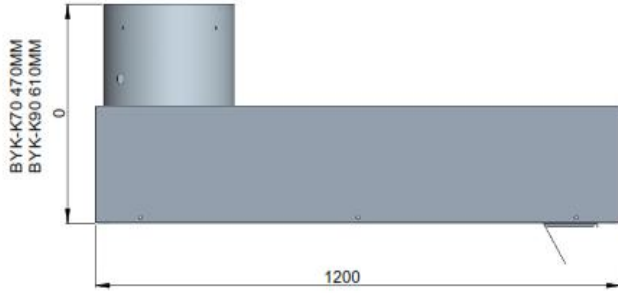


BYK-HEAT RECOVERY UNIT (IGD)

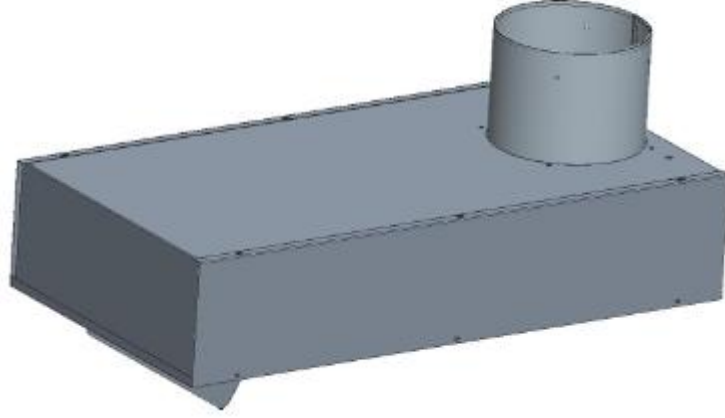

Heat exchanger effience

Inlet water temperature 14.3 °C

Out water temperature 37.3 °C

HEAT RECOVERY ÜNİT

ÜR- BYK-IGD

Revision No : 0

İNOKSAN A.Ş.

Revision Date : 04.08.2022

GENERAL INSTRUCTIONS

- * Wet surface AISI 304 Cr-Ni stainless steel.
- * 0.25 kW Motor Power.
- * Hot air is drawn through the chimney with the help of a fan without drying it, and the inlet water is heated by means of the heat exchanger.
- *Suitable for BYK-LR 270-360.
- *Can not useable BYK without drying.
- * Can not useable BYK220 LR
- *Increase mean water inlet temprature to 22-24°C
- *Suitanble for cold water inlet when hot wather does not reachable.
- *Save electric energy up to 14kW per hour.
- *Optional.

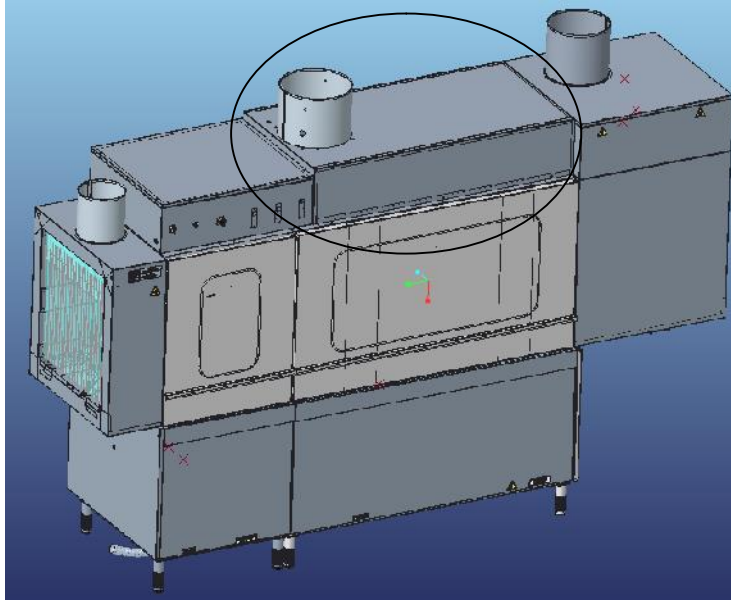


Image BYK-K70-IGD

HEAT RECOVERY ÜNİT	ÜR- BYK-IGD	Revision No : 0
	İNOKSAN A.Ş.	Revision Date : 04.08.2022

Organize Sanayi Bölgesi Ormanlar CD. No:5 16159 Nilüfer/BURSA inoksan@inoksan.com.tr T. +90 224 294 74 74 - F. +90 224 243 61 23