
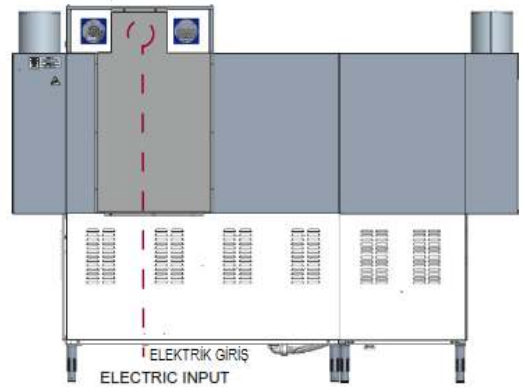
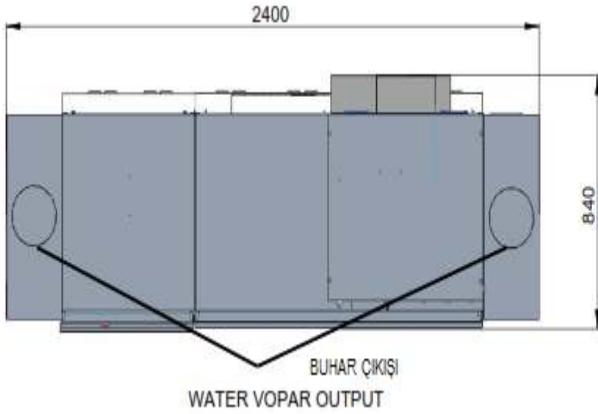
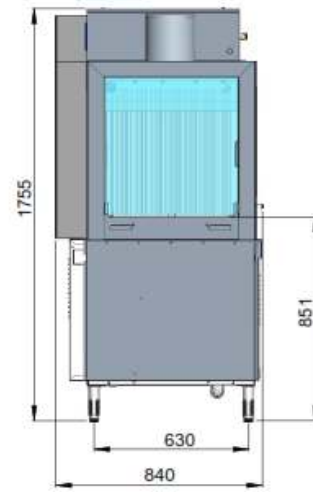
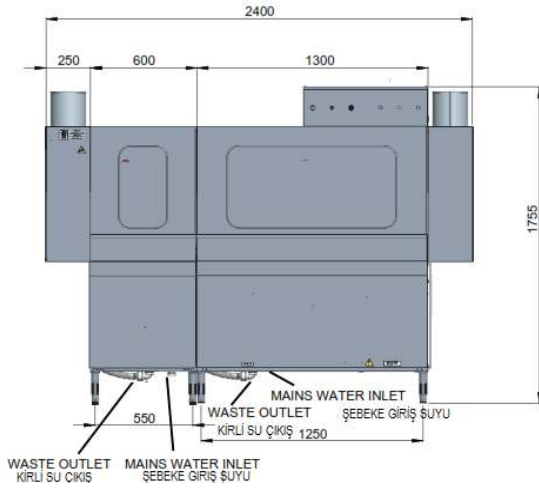


## BYK270 LR DISWASHER WITH CONVEYOR

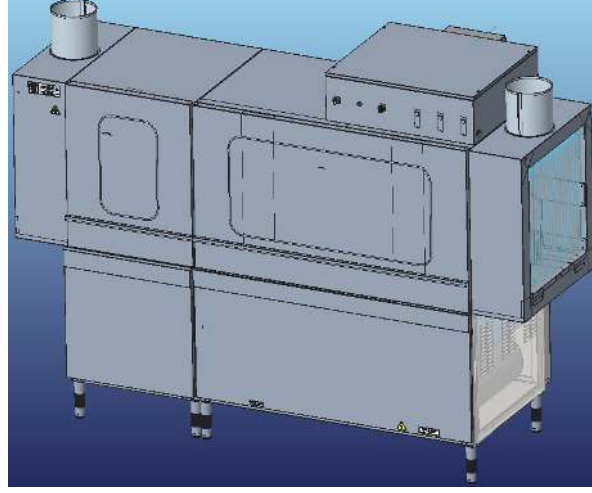

DISHWASHER WITH  
CONVEYOR  
BYK270 LR

ÜR- BYK270 LR

İNOKSAN A.Ş.

Revizyon No : 0

Revizyon Tarihi : 09.12.2022

## GENERAL FEATURES

- \*Pre washing module (45-50°C)
- \*There are 3 active wash arms in the prewash
- \*single rise operation
- \* Two speed (rapid- slow) washing ,
- \* Easy to dismount/mount washing / rinsing arms and filters for cleaning purposes ,
- \* Suitable for washing kitchen utensils height of 480 mms max,
- \* Safety system stops the operation when the dishwasher's door is open .
- \* Rack dimensions - 500x500 mm ,
- \* Boiler includes temperature safety thermostats ,
- \* Temperature of the washing tank is controlled by safety thermostat.
- \* Parts in contact with water are manufactured with stainless steel .
- \* Machine includes
  - 2 pcs plate racks ,
  - 2 pcs cutlery racks ,
  - 2 pcs glass racks ,
- \* Optionals: Detergent pump and rinse-aid pump
- \* Automatic tank water level is controlled by pressure switch
- \* Digital thermometers display to water temperature ,
- \*Suitable height and depth for installation of the inlet and outlet tables.

## TECHNICAL SPECIFICATIONS

Water inlet	3/4	inches
Water pressure	2-4	Bar
Electric inlet	380	V
Washing Motor Power	1,5	kW
Pre Washing pump	0,6	kw
Max. Electric power	34,6	kW
Frequency	50-60	Hz
Water consumption	3,6	Lts/cyc
Tank power	8	kW
Boiler Power	24	kW
Reducer motor power	0,55	kW
Washing temperature	55	°C
Rinsing temperature	73-85	°C
Water inlet temperature	45-50	°C
Boiler capacity	21	lts
Washing tank capacity	125	lts
Prewash capacity	60	lts
Plate capacity	2700	pcs/h
Rack capacity	168	pcs/h
Max utensil height	480	mms
Plate height	330	mms
Cable section	4x16	mm2