

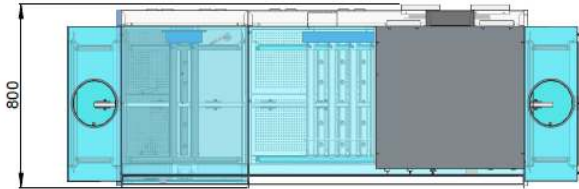
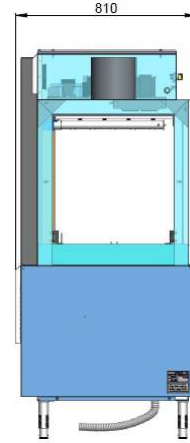


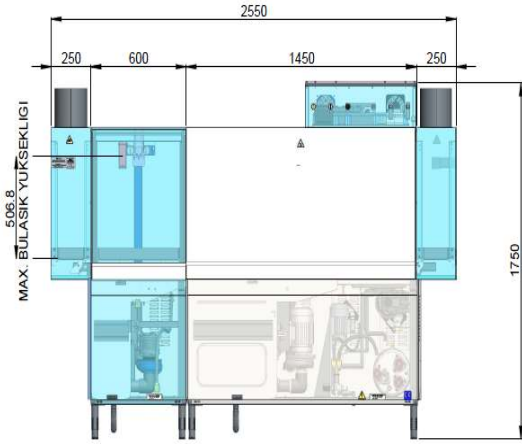

BYK360 LR CONVEYOR TYPE DISHWASHER

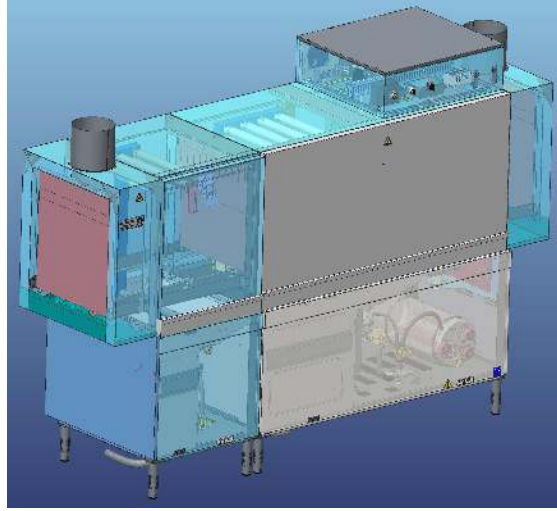

CONVEYOR TYPE
DISHWASHER BYK360 LR

ÜR- BYK360 LR

iNOKSAN A.Ş.

Revizyon No : 0

Revizyon Date: 26.03.2019

Organize Sanayi Bölgesi Ormanlar CD. No:5 16159 Nilüfer/BURSA inoksan@inoksan.com.tr T. +90 224 294 74 74 - F. +90 224 243 61 23

GENERAL FEATURES

- * Double rinse , Built-in rinse pump
- * Electromechanically controlled ,
- * Pre-washing unit with 3 washing arms,
- * Double speed (rapid- slow) washing ,
- * Easy to dismount/mount washing / rinsing arms and filters for cleaning purposes ,
- * Suitable for washing kitchen utensils upto the height of 480mms,
- * Safety system to stop the operation of the dishwasher when the door is opened ,
- * Rack dimensions of 500x500 mms ,
- * Temperature safety thermostats of boiler,
- * Temperature safety thermostats of well,
- * Parts in contact with water manufactured of AISI 304 Cr-Ni s/s sheet ,
- * 2 pcs plate rack ,
- * 2 pcs cutlery rack ,
- * 2 pcs glass rack ,
- * Optionals: Rinsing pump, detergent pump, rinse aid pump and heat recovery system,
- * Water level inside the tank controlled by a presostat automatically ,
- * Conveyor feeding system driven by a rotating mechanism ,
- * Digital thermometers displaying the water temperature ,
- * Suitable height and depth for installation to the inlet and exit tables,
- * Modular system (pre-washing, washing, rinsing, drying)

TECHNICAL SPECIFICATIONS

Water inlet	3/4	inches
Water pressure	2-4	Bar
Electric inlet	380-50	V-Hz.
Washing Motor power	1,5	kW
Pre-washing motor power	0,6	kW
Max. Electric power	34,9	kW
Rinse pump power	0,25	kw
Frequency	50-60	Hz
Water consumption	2,7	Lts/cyc
Tank power	8	kW
Boiler power	24	kW
Reducer motor power	0,55	kW
Washing temperature	55	°C
Rinsing temperature	85	°C
Water inlet temperature	45-50	°C
Boiler volume	21	lts
Main washing tank water volume	125	lts
Pre washing tank water volume	54	lts
Plate capacity	3600	pcs/h
Rack capacity	225	pcs/h
Glass capacity	6500	pcs/h
Tray capacity	1800	pcs/h
Plate diameter Max.	350	mms
Max utensil height	480	mms
Cable section	4x16	mm2
Rinsing Motor power	0,33	kW