
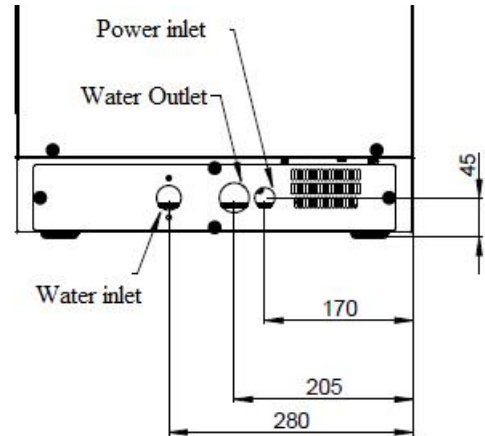
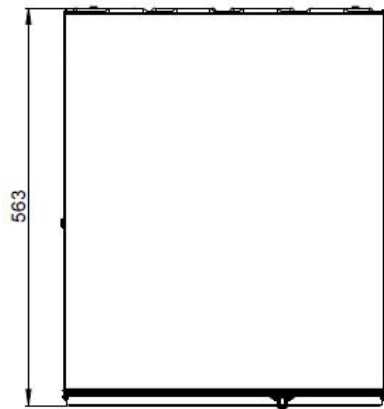
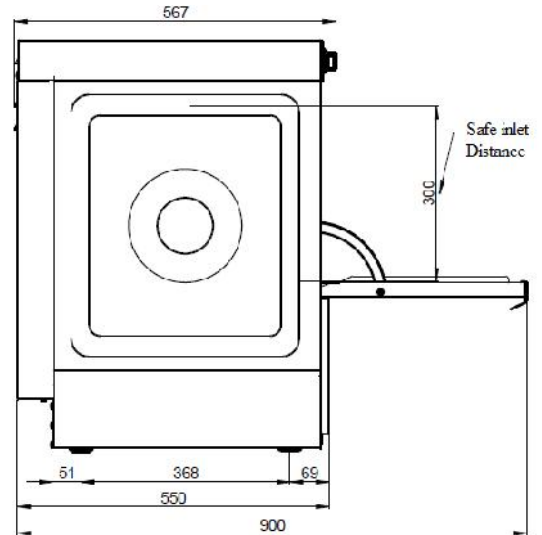


# İNOKSAN

## BYM042S

### UNDERCOUNTER DISHWASHER

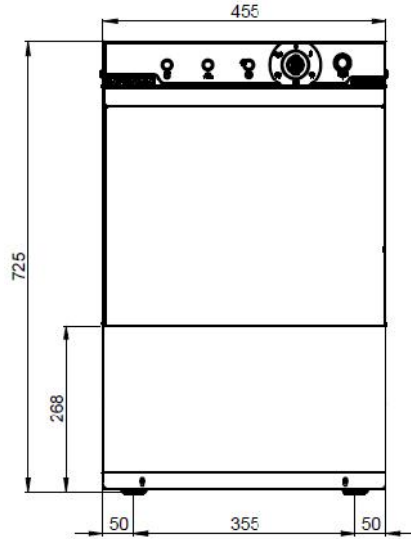

## GENERAL FEATURES

- \* Suitable for undercounter installation
- \* Electromechanic control
- \* Easy to dismount and mount washing/rinsing arms and filters for cleaning purposes,
- \* Safety system to stop the operation when the door is opened ,
- \* Rack dimensions 400x400 mms
- \* Boiler temperature safety thermostats ,
- \* AISI 304 Cr-Ni S/S
- \* Complete with 1 pc glass rack
- \* When necessary, possibility to install rinsing pump where the water pressure is not sufficient and drain pump where the drain level is high ,
- \* Optional rinsing, draining, detergent and rinse aid pumps.
- \* Lower and top levels of water in the tank controlled by prosestat ,
- \* Starting the machine through door .

## TECHNICAL FEATURES

|                         |         |                 |
|-------------------------|---------|-----------------|
| Water inlet             | 3/4     | inches          |
| Water pressure          | 2-4     | Bar             |
| Power inlet             | 230-50  | V-Hz.           |
| Washing Motor Power     | 0,25    | kW              |
| Max. Electric Power     | 4,15    | kW              |
| Frequency               | 50      | Hz              |
| Water consumption       | 2,7     | Lt/cyc          |
| Tank power              | 1,2     | kW              |
| Boiler Power            | 2,6     | kW              |
| Washing Temperature     | 55      | °C              |
| Rinsing Temperature     | 85      | °C              |
| Water Inlet Temperature | 50-55   | °C              |
| Boiler Volume           | 2,7     | lts             |
| Tank Water Volume       | 13      | lts             |
| Rack Capacity           | 40      | pcs/h           |
| Glass Capacity          | 600-800 | pcs/h           |
| Program Number          | 3       | pcs             |
| Short Program           | 90      | secs            |
| Medium Program          | 120     | secs            |
| Long Program            | 180     | secs            |
| Cable cross section     | 3x2,5   | mm <sup>2</sup> |
| Weight                  | 37      | kg              |
| Rinsing Motor Power     | 0,33    | kW              |
| Draining Motor Power    | 31      | watts           |
| Detergent Pump Power    | 8       | watts           |
| Rinsing Aid Pump Power  | 8       | watts           |