

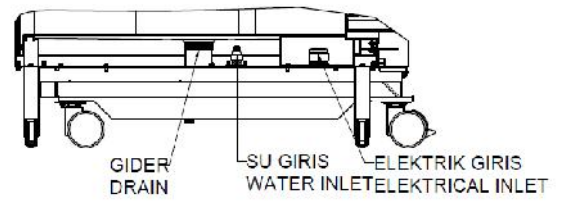
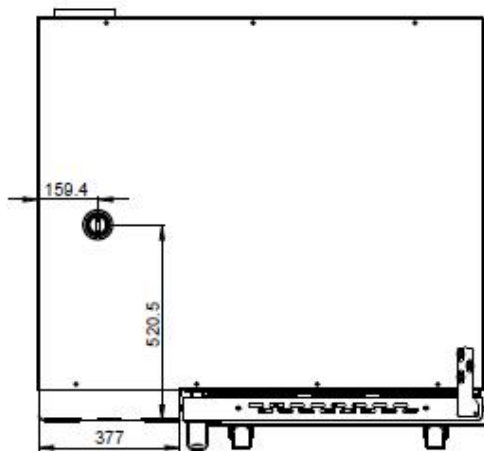


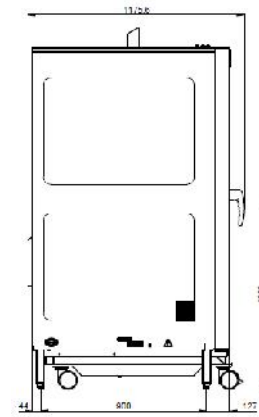

FKE40 CONVECTION ELEKTRICAL OVEN

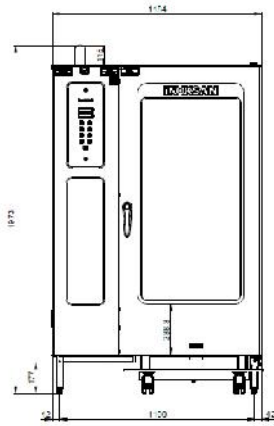

GENERAL SPESIFICATION

- * It is manufactured from AISI304 18/8 Cr-Ni stainlees steel sheet.
- * Cooking temperature and time can be set manually on the digital control panel
- * Alert code on electronic board (reset, temperature, time vs.)
- * It is capable of cooking 20 trays with GN 2/1 or 40 trays with GN 1/1 mm at once.
- * The space between the racks is 65 mm.
- * Specially designed interior cabin (especially fan baffle) that provides homogeneous cooking.
- * Limit thermostat in cabin interior
- * Self Cooling
- * 6 different fan speed
- * It can be manuel humidification
- * Two step oven door lock system
- * Double glass technology that prevents heat loss
- * Interior cabin lighting
- * Easily replaceable door gasket

TECHNICAL SPESIFICATION

Fan Motor Power	0,85 x 2	kW
Electrical Inlet	380-400 V 3N AC	V
Frequency	50	Hz
Max. Electrical Power	50+2	kW
Cooking Capacity	GN 1/1*40	piece
Capacity	20 GN 2/1 veya 40 GN 1/1	
Distance Of Shelves	65	mm
Water Pressure	2-4	bar
Water Inlet	3/4	INC
Diemensions	1180x1070x1893	WxDxH
Cooking Chamber Volumes	0,87	m³
Net Weight	313	KG
Gross Weight	356	KG