
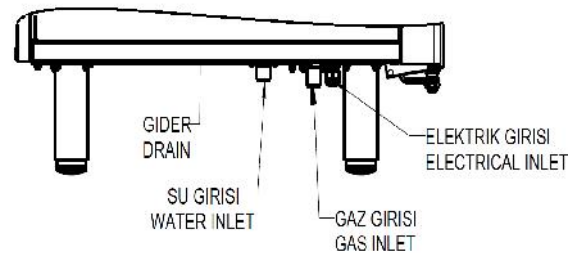
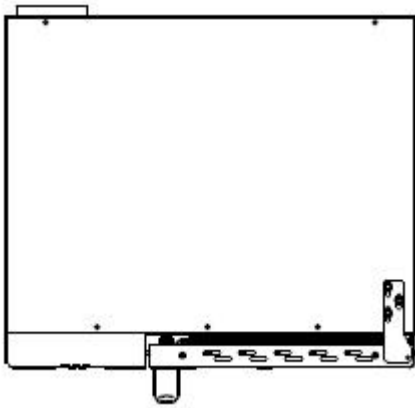
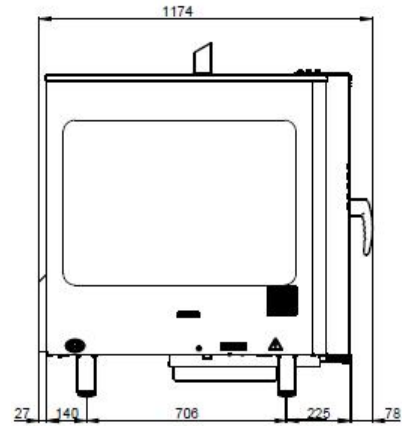


FKG20 GAS CONVECT OVEN

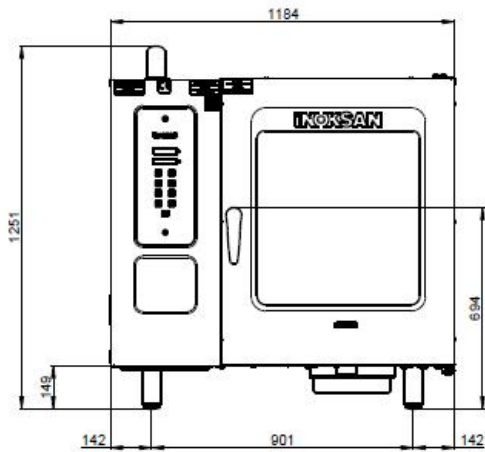

GENERAL SPESIFICATION

- * It is manufactured from AISI304 18/8 Cr-Ni stainlees steel sheet
- * Cooking temperature and time can be set manually on the digital control panel
- * Alert code on electronic board (reset, temperature, time vs.)
- * It is capable of cooking 10 trays with GN 2/1 or 20 trays with GN 1/1 mm at once.
- * The space between the racks is 65 mm.
- * Specially designed interior cabin (especially fan baffle) that provides homogeneous cooking.
- * Limit thermostat in cabin interior
- * Self Cooling
- * 6 different fan speed
- * It can be manuel humidification
- * Two step oven door lock system
- * Double glass technology that prevents heat loss
- * Interior cabin lighting
- * Easily replaceable door gasket
- * It is opareted with LPG and NG and conversion is possible
- * Gas valve includes a safety system equipped with electronic ignition and it automatically cuts the gas, flame

Gas Power	24(NG) 25(LPG)	kW
Fan Motor Power	0,85	kW
Electrical Inlet	230 V AC 1N+PE	V
Frequency	50	Hz
Max. Electrical Power	1,1	kW
Max. Gas Power	25	kW
Gas Consumption (NG)(G20)	2,646	m³/h
Gas Consumption (LNG)(G30/G31)	1,972	Kg/h
Nominal Gas Pressure (NG)(G20)	20	mbar
Nominal Gas Pressure (LPG)(G30/G31)	30/37	mbar
Cooking Capacity	GN 1/1*20	piece
Capacity	10 GN 2/1 veya 20 GN 1/1	
Distance of Shelves	65	mm
Gas Inlet	¾	INC
Water Pressure	2-4	bar
Water Inlet	¾	INC
Diemensions	1180x1070x1190	WxDxH
Cooking Chamber Volumes	0,42	m³
Net Weight	---	KG